



WATERWORKS REGULATOR ONE HOLE GOOSENECK BAR FAUCET - BLACK WHEEL HANDLE



TECHNICAL DETAILS

Deck Thickness Maximum: 2 1/16"
 Deck Thickness Minimum: 1/4"
 Fittings Hole Diameter: 1 3/4"
 Handle Turn Angle: Quarter Turn
 Depth / Width: 10 9/16"
 Height: 12 1/2"
 Inlet Connection Size: 3/8"
 Inlet Connection Type: Compression Connection Hoses
 Integrated Diverter: N
 Integrated Spray: N
 Length: 4 13/16"
 Spout Swivel: Y
 Spray Included in Unit: N
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

A play on industrial controls from the early 1900s, when pride was lavished on parts. Translated to handcrafted, fittings project rugged beauty through powerful, detailed shapes.

CODES & STANDARDS

Code # RGKM01: CEC


PRODUCT FEATURES

Progressive Control. When the wheel handle is rotated the flow of cold water begins; continue rotating activates the mixing by adding hot water; at the end of the rotation, only hot water flows. Full rotation is a quarter turn
8" Gooseneck Swivel Spout

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in high efficiency flow options. Contact a sales associate for details.




WATERWORKS REGULATOR ONE HOLE GOOSENECK BAR FAUCET - BLACK WHEEL HANDLE




TOP VIEW SCALE: 1/8"=1'-0"



ISO VIEW SCALE: 1/8"=1'-0"

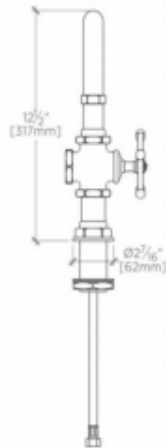

FRONT VIEW SCALE: 1/8"=1'-0"

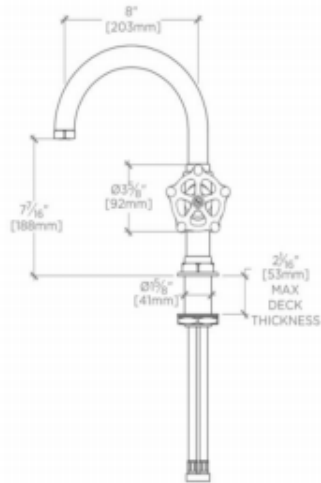

SIDE VIEW SCALE: 1/8"=1'-0"